

Hinges with dual function

Friction hinges

Lift-off torque hinges



For vertical or horizontal applications.

Cycle life: 30,000 cycles.



14-7-3907 and 14-7-3906: torque 0.3 N.m +/- 67%

14-7-3904 and 14-7-3905: torque 1.6 N.m +/- 20%

Produced mainly in stainless steel, for a complete description of the materials contact us.



	Part number	Material	Finish	A	B	C	D	E	F	G	S	Torque	Note	Weight (g)
NEW	14-7-3906	304 stainless steel	polished	50	35	2	10	25	5	30	4.5	0.3 N.m	Type 1	42
NEW	14-7-3907	304 stainless steel	polished	50	35	2	10	25	5	30	4.5	0.3 N.m	Type 2	42
NEW	14-7-3904	304 stainless steel	polished	75	50	2	12	32	6	50	4.5	1.6 N.m	Type 1	96
NEW	14-7-3905	304 stainless steel	polished	75	50	2	12	32	6	50	4.5	1.6 N.m	Type 2	96

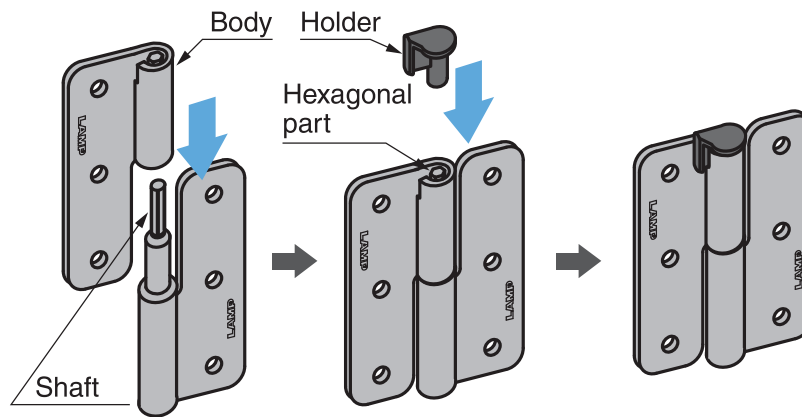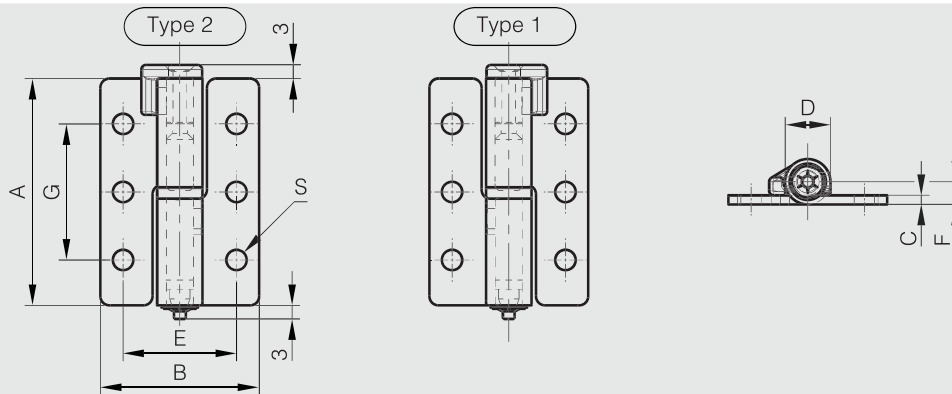

Insert the body into axis, and then insert the holder into the hexagonal part of axis to generate torque.

To detach, use a tool to push the holder out.