



Toggles latches

Spring loaded toggle latches without strike - 74 mm


Dimension A (74 mm) without tension. Dimension A can be extended up to 4 mm putting the latch under tension.

These latches are used with strike part numbers 16-7-3751 and 16-7-3754.

Padlockable option is available for part number 16-7-3766.



| Part number | Material | Finish | A | B | C | Note | Weight (g) |
|-------------|---------------------|--------|----|----|----|-----------|------------|
| 16-7-3745 | 304 stainless steel | raw | 74 | 47 | 15 | undrilled | 70 |
| 16-7-3748 | 304 stainless steel | raw | 74 | 47 | 15 | drilled | 70 |

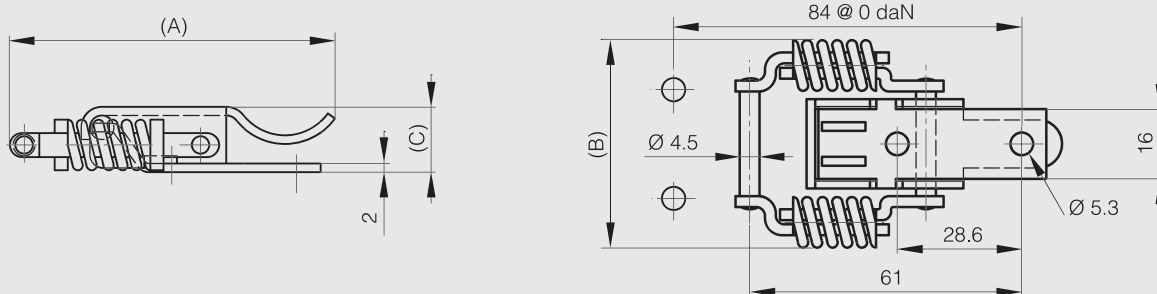

Strikes for part numbers 16-7-3745 and 16-7-3748



| Part number | Material | Finish | A | B | Note | Weight (g) |
|-------------|---------------------|--------|----|----|-----------|------------|
| 16-7-3751 | 304 stainless steel | raw | 36 | 40 | undrilled | 20 |
| 16-7-3754 | 304 stainless steel | raw | 36 | 40 | drilled | 20 |

