Spring loaded and padlockable toggle latches - 74 mm

STAINLESS STEEL STEEL RoHS

Dimension A (74 mm) without tension. Dimension A can be extended up to 4 mm putting the latch under tension.
This latch is used with strike part numbers 16-7-3751, 16-7-3753 and 16-7-3754.

Part number	Material	Finish	A	B	C	Weight (g)
16-7-3765	steel	zinc plated	74	46.5	15	75
16-7-3766	304 stainless steel	raw	74	46.5	15	75

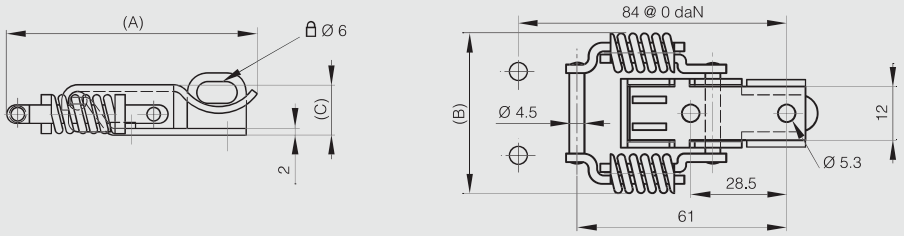

Strikes for part numbers 16-7-3765 and 16-7-3766

STAINLESS STEEL STEEL RoHS
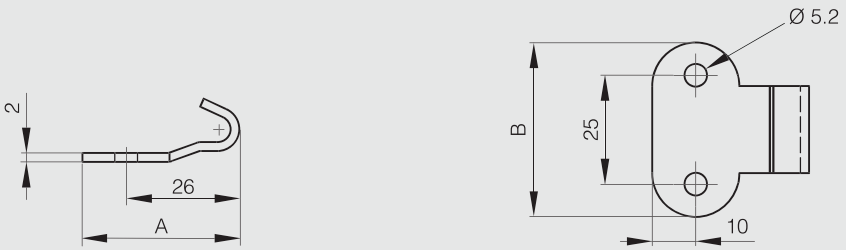
Part number	Material	Finish	A	B	Note	Weight (g)
16-7-3753	steel	zinc plated	36	40	drilled	20
16-7-3751	304 stainless steel	raw	36	40	undrilled	20
16-7-3754	304 stainless steel	raw	36	40	drilled	20