

Stainless steel range - Latching systems

Magnetic catches

Compact magnetic catch

Suitable for temperatures below 80°C.

To avoid breakage, counterplate should not contact the magnet.


Screw heads should not protude above the base plate.

Magnet is coated with acrylic resin to be corrosion resistant.

Part number	Material	Finish	Α	В	С	Force	Weight (g)
16-7-4300	430 stainless steel	polichod	41	16.5	2.8	5ka	12





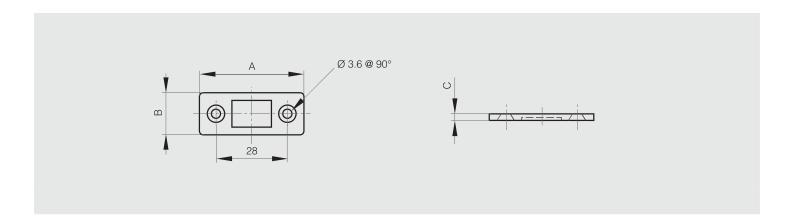

Screw-on magnetic catch without counter plate - force 14 kg

Strong magnetic force.

Material: 304 stainless steel / steel / neodymium.


Counter plate not included.

Produced mainly in stainless steel, for a complete description of the materials contact us.

Part number	Material	Finish	Α	В	С	D	Force	Weight (g)
16-7-4297	304 stainless steel	polished	50	17	12.3	40	14kg	41





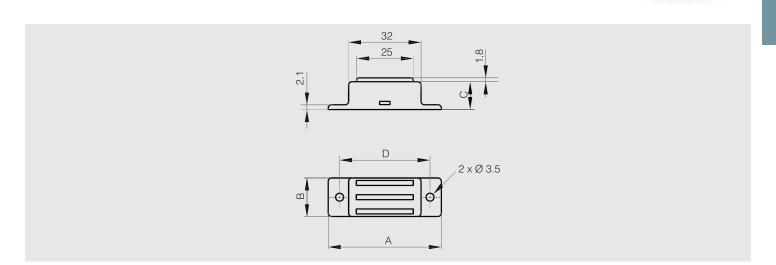

PINET

www.pinet-industrie.com Catalogue 022