




Stainless steel range - Hinges

Concealed hinges for nested doors only

Concealed hinges without spring - 95° opening



Part number	Material	Finish	A	B	C	D	Weight (g)
62-1-4008	304 stainless steel	raw	51	75	3	6	210

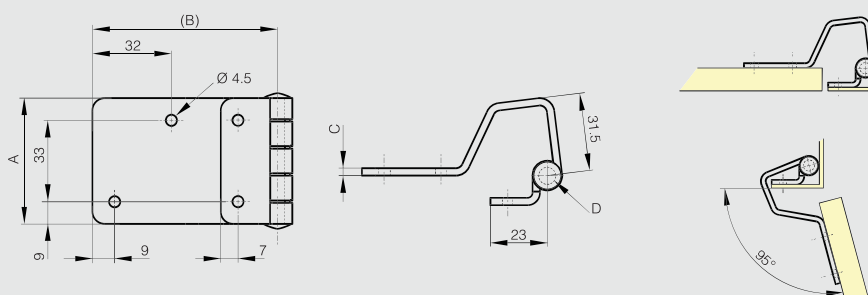

Concealed hinge with friction - 90° opening



Initial torque (0.7 N.m) may vary from -20% to +40%.

For indoor use only.

Can be used both for horizontal and vertical applications.

Cycle life: 20,000 cycles.

Produced mainly in stainless steel, for a complete description of the materials contact us.



Part number	Material	Finish	A	B	C	Torque	Weight (g)
70-7-3623	304 stainless steel	polished	40	67	29.5	0.7 N.m	51

