

ALUMINIUM FRAME SLIDING DOOR SYSTEM

FD80-AF

ARCHITECTURAL DOOR HARDWARE FOR GLASS DOORS


ALUMINIUM FRAME SLIDING DOOR SYSTEM




	a	b	c	d
	Two-Way Soft Close	Standard Sliding	Two-Way Soft Close	Standard Sliding
Roller	Recessed Mount	Recessed Mount	Surface Mount	Surface Mount
Door Weight	Max. 80 kg/Door			
Glass Thickness	5 or 6 mm			
Door Width	784 - 1500 mm	Max. 1500 mm	804 - 1500 mm	Max. 1500 mm
Door Height	Max. 3000 mm			
Height Adjustment	-1/+4 mm		±4 mm	

Features


- Two-way soft closer option available.
- Surface or recessed mount roller available.
- Thick aluminium profile provides excellent rigidity preventing door flex.
- Ball bearing roller provides ultra smooth movement.
- Easy assembly and installation.
- Intermediate support not needed when door size within H 2200 mm x W 900 mm.
- No rail on floor needed.
- Swing door version available for total coordination (P.710 - 711).
- Black frame available by special order.

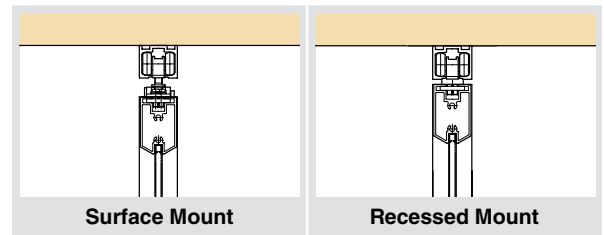


* Intermediate support required when either door height or door width exceeds standard size. Pictures shown below are door size examples which require intermediate support.




Standard Size [No support required.]
(Smaller than H 2200 x W 900)



1 Support
(Smaller than H 2000 x W 1600)



2 Supports
(Smaller than H 2200 x W 1500)



3 Supports
(Smaller than H 2500 x W 1300)

