

SERIES 2TS TWIN WHEEL SWIVEL & 2TF FIXED CASTORS

Load Capacity: up to 5,000kg



Brauer 2TS and 2TF Twin Wheel Castors are based on the 'T' Series swivel design using two 'Heavithane' Polyurethane tyred wheels on a cast iron centre.

Using two wheels allows for heavier loads without needing to increase the wheel diameter thus retaining a compact overall height.

'Heavithane' Tyres offer comparatively low tractive effort, low noise, high wear resistance and running surface preservation.

Effective Temperature Range: -20° to +60°

Alternative Steel and Nylon wheel options available (see table below for details)

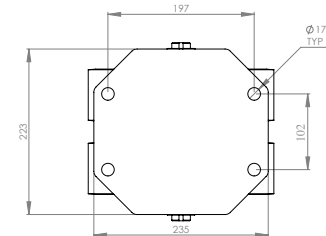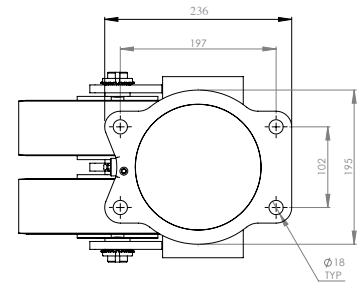

Wheel Diameter (mm)	Tread Width (mm)	Wheel Type	Bearing Type	Overall Height	Offset (mm)	Load Capacity (Kg)	Mounting Hole centres to suit 16mm bolt	Swivel Castor PART NUMBER	Weight Swivel (Kg)	Fixed Castor PART NUMBER	Weight Fixed (Kg)
200	75	H200/75/TBM25	Taper Roller	268	232	3500	197 x 102	2TS/H200/75TB	35	2TF/H200/75TB	27
250	70	H250/70/TBM25	Taper Roller	319	254	4000	197 x 102	2TS/H250/70TB	40	2TF/H250/70TB	31
300	75	H300/75/TBM25	Taper Roller	369	279	4600	197 x 102	2TS/H300/75TB	50	2TF/H300/75TB	40
200	75	NFT200/75/TBM25	Taper Roller	268	232	4000	197 x 102	2TS/NFT200/75TB	12	2TF/NFT200/75TB	8
250	70	NFT250/70/TBM25	Taper Roller	319	254	4500	197 x 102	2TS/NFT250/70TB	23	2TF/NFT250/70TB	15
300	75	NFT300/75/TBM25	Taper Roller	369	279	5000	197 x 102	2TS/NFT300/75TB	35	2TF/NFT300/75TB	24
200	75	SFT200/75/TBM25	Taper Roller	268	232	4000	197 x 102	2TS/SFT200/75TB	40	2TF/SFT200/75TB	30
250	70	SFT250/70/TBM25	Taper Roller	319	254	4500	197 x 102	2TS/SFT250/70TB	45	2TF/SFT250/70TB	35
300	75	SFT300/75/TBM25	Taper Roller	369	279	5000	197 x 102	2TS/SFT300/75TB	55	2TF/SFT300/75TB	45

- Maximum towing speed 6KPH.