

# E Series

Swivel load rating 250kg



**HIGH TEMPERATURE PHENOLIC WHEEL MAXIMUM TEMPERATURE 220°C**

Note: Swivel Bracket is supplied un-greased



**SWIVEL**


(NOTE: swivel lock and brake fitted as standard)



**FIXED**

**SWIVEL CASTORS TOP PLATE DIMENSIONS**

Wheel Dia.	Plate Size	Hole Centres	Fixing Bolt Dia.
76	105 x 85	83/76 x 64/56	8
100	105 x 85	83/76 x 64/56	8
125	135 x 110	105 x 75/85	10
150	135 x 110	105 x 75/85	10

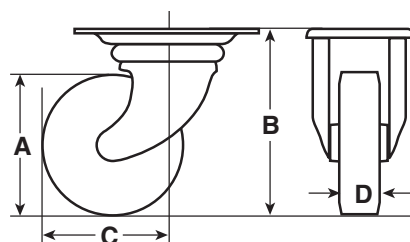

**FIXED CASTORS TOP PLATE DIMENSIONS**

Wheel Dia.	Plate Size	Hole Centres	Fixing Bolt Dia.
76	105 x 85	83/76 x 64/56	8
100	105 x 85	83/76 x 64/56	8
125	140 x 114	105 x 75/85	10
150	140 x 114	105 x 75/85	10

FOR TECHNICAL INFORMATION COVERING LOAD FACTORS, ETC., SEE 'DESIGN DATA' INDEX ON PAGE 20

A	B	C	D			Swivel		Fixed	
Wheel Diameter	Overall Height	Swivel Radius	Tread Width	Max Load Rating	Wheel Bearing Type	PART NUMBER	Approx Weight kg	PART NUMBER	Approx Weight kg
<b>HIGH TEMPERATURE SOLID PHENOLIC WHEEL</b>									
76	106	75	30	100	None	ES/HT76/30PB/L	0.9	EF/HT76/30PB	0.6
100	128	87	32	150	None	ES/HT100/32PB/L	1	EF/HT100/32PB	0.7
125	160	117	50	200	None	ES/HT125/50PB/L	2.7	EF/HT125/50PB	1.8
150	190	130	50	250	None	ES/HT150/50PB/L	3	EF/HT150/50BPB	2.2

**E SERIES CASTORS**