



# Kuličkové transportní jednotky

 25 - 110 kg

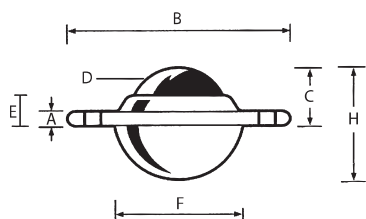

D	F	B	C	H	A	E	Ø upevňovacího otvoru	Ø otvoru pro montáž jednotky	
mm	mm	mm	mm	mm	mm	mm	mm	mm	kg

## Ocelová kulička

19	29,5	61,0	10,0	22,0	3,2	6,8	5,5	45	25	MIE37.019
25	38,1	73,0	14,2	30,0	3,0	7,9	5,0	56	55	MIE37.025
32	46,0	73,8	16,2	36,0	4,2	8,3	5,0	59	110	MIE37.032
40	63,3	94,6	21,2	48,5	6,3	12,7	7,0	70	110	MIE37.040

## Nylonová kulička

19	29,5	61,0	10,0	22,0	3,2	6,8	5,5	45	25	MIE38.019
25	38,1	73,0	14,2	30,0	3,0	7,9	5,0	56	55	MIE38.025




## Kuličkové jednotky


### Nosná kulička

Ocel/Nylon

### Tělo jednotky

Ocel



D	F	B	C	H	A	E	Ø zóvitu	Délka zóvitu	
mm	mm	mm	mm	mm	mm	mm	mm	mm	kg

19	32,1	33,6	30,2	65		25	M8	30	25	MIE39.019
25	39,7	41,2	32,5	75		34	M8	28	55	MIE39.025
40	55,5	57,0	37,0	99		45	M10	40	110	MIE39.040

## Kuličkové jednotky

### Nosná kulička

Ocel

### Tělo jednotky

Pozinkovaná ocel

