

Flow resistance

SW 100 G1/8-AG

Part no.: 10.05.04.00007

<https://www.schmalz.com/10.05.04.00007>



Homepage > Vacuum Technology for Automation > Vacuum Components > Valve Technology > Check Valves and Flow Restrictors > Flow

Restrictors SW > SW 100 G1/8-AG

Flow resistor for reduction of the volume flow rate




Nominal size: 1.00 mm

Length L: 6 mm

Thread G1: G1/8-M

Material: Aluminium

Design Data

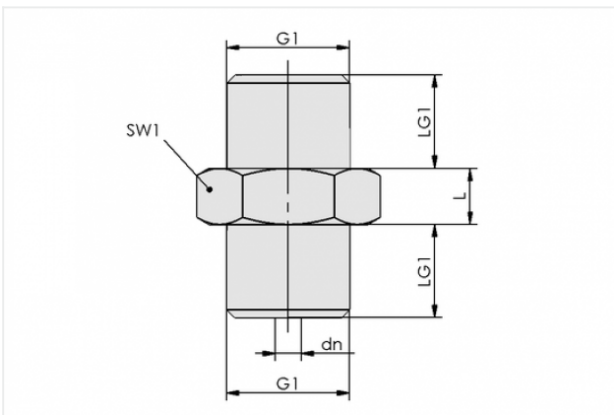

Attribute	Value
-----------	-------

G1	G1/8"-M
----	---------

dn	1 mm
----	------

L	6 mm
---	------

LG1	9.5 mm
-----	--------

SW1	14 mm
-----	-------

Technical Data

Attribute	Value
-----------	-------

Nominal size	1.00 mm
--------------	---------

Evacuation rate for $p_u = -0,3$ bar	0.47 m ³ /h
--------------------------------------	------------------------

Contact to Schmalz

J. Schmalz GmbH | Johannes-Schmalz-Straße, 72293 Glatten, Deutschland | +49 7443 2403-102 | customercenter@schmalz.de



Attribute	Value
Evacuation rate for pu = -0,3 bar	7.8 l/min
Evacuation rate for pu = -0,6 bar	0.5 m ³ /h
Evacuation rate for pu = -0,6 bar	8.4 l/min
Weight	5 g
