

# vacuum area gripper

## FXP-SW60 442 5R18 O10010 F

Part no.:10.01.38.00710

<https://www.schmalz.com/10.01.38.00710>


Homepage > Vacuum Technology for Automation > Vacuum Components > Area Gripping Systems and End Effectors > Vacuum Area Gripping System FXP/FMP > Area Gripping Systems FXP > FXP-SW60 442 5R18 O10010 F

### Vacuum area gripping system with integrated pneumatic vacuum generator and flow resistors



Length L: 442 mm  
 Width B: 130 mm  
 Arrangement: 5 rows, 18mm  
 Material-Type: Foam O, Height 2x10 mm  
 Flat recess: slot  
 with: Filter  
 with: Multi-stage ejector SEMP 50  
 Nozzle diameter: 0.6 mm  
 Weight: 2.1 kg  
 Air consumption: 250 l/min

### Design Data

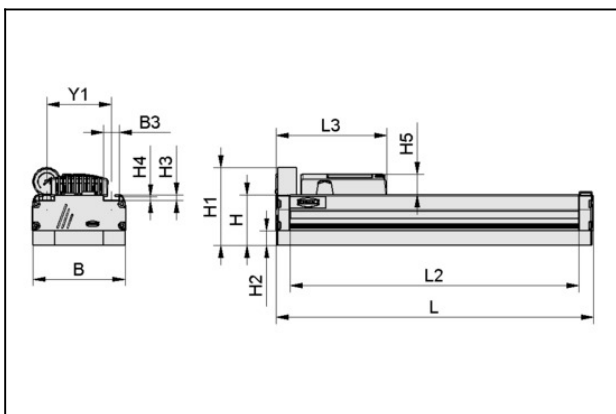

Attribute	Value
B	130 mm
H	70 mm
H1	109 mm
L	442 mm
L2	402 mm
Valve type	SW

### Technical Data

Attribute	Value
Arrangement	5R18

### Contact to Schmalz

J. Schmalz GmbH | Johannes-Schmalz-Straße, 72293 Glatten, Deutschland | +49 7443 2403-102 | [customercenter@schmalz.de](mailto:customercenter@schmalz.de)

## vacuum area gripper

### FXP-SW60 442 5R18 O10010 F

Part no.:10.01.38.00710

<https://www.schmalz.com/10.01.38.00710>

Attribute	Value
Material type	Foam O, Height 2x10 mm
Number of suction cells	110
Suction force	340 N
Suction rate (max.)	1,050 l/min
Air consumption	250.0
Sealing element	Sealing Foam
Add. function	Filter
Weight	2.1 kg

Sound level: 74 dB(A) Max. degree of evacuation 55%

---

---