

# Light Duty Castors F Series

Swivel load rating 380kg



**SWIVEL**




**FIXED**

(NOTE: swivel lock and brake fitted as standard)

**SWIVEL CASTORS TOP PLATE DIMENSIONS**

Wheel Dia.	Plate Size	Hole Centres	Fixing Bolt Dia.
75	105 x 85	83/76 x 64/56	8
100	105 x 85	83/76 x 64/56	8
125	135 x 110	105 x 75/85	10
150	135 x 110	105 x 75/85	10

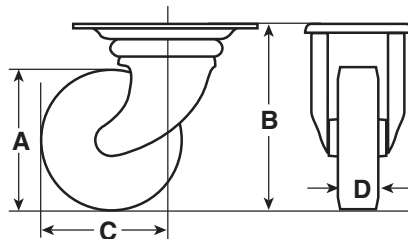

**FIXED CASTORS TOP PLATE DIMENSIONS**

Wheel Dia.	Plate Size	Hole Centres	Fixing Bolt Dia.
75	105 x 85	83/76 x 64/56	8
100	105 x 85	83/76 x 64/56	8
125	140 x 114	105 x 75/85	10
150	140 x 114	105 x 75/85	10

FOR TECHNICAL INFORMATION COVERING LOAD FACTORS, ETC., SEE 'DESIGN DATA' INDEX ON PAGE 20

A	B	C	D				Swivel	Fixed	
Wheel Diameter	Overall Height	Swivel Radius	Tread Width	Max Load Rating	Wheel Bearing Type	PART NUMBER	Approx Weight kg	PART NUMBER	Approx Weight kg
<b>CAST IRON CENTRED WHEEL WITH POLYURETHANE TYRE</b>									
75	106	75	35	300	Ball Journal	FS/H75/35BJ/L	1.8	FF/H75/35BJ	0.8
100	128	87	40	360	Ball Journal	FS/H100/40BJ/L	2.9	FF/H100/40BJ	1.9
125	160	117	30	360	Ball Journal	FS/H125/30BJ/L	3.0	FF/H125/30BJ	2.0
150	190	130	35	380	Ball Journal	FS/H150/35BJ/L	3.6	FF/H150/35BJ	2.6

NOTE: Also available with other wheel types.

F SERIES CASTORS