

# Bellows suction cup (round)

<https://www.schmalz.com/10.01.06.00883>



## FG 25 HT1-60 N016

Part no.: 10.01.06.00883


Homepage > Vacuum Technology for Automation > Vacuum Components > Vacuum Suction Cups > Bellows Suction Cups (Round) > FG 25 HT1-60 N016

### Bellows suction cup (round) for very uneven workpieces



Size: 25  
Suction cup material:  
High temp material HT1  
Material hardness: 60 °Sh  
Number of folds: 2.5  
Material property: imprint-free

### Design Data

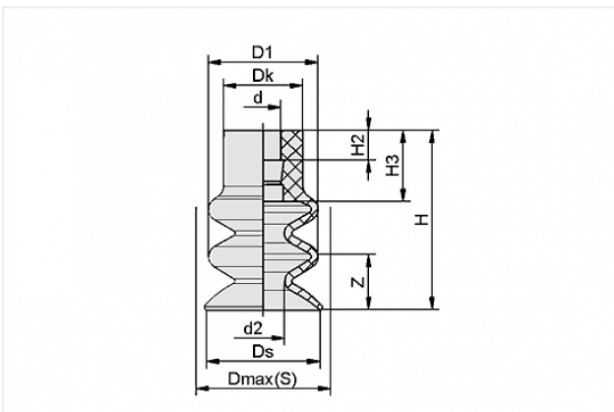

Attribute	Value
-----------	-------

d	4.5 mm
---	--------

d2	10 mm
----	-------

D1	25 mm
----	-------

Dk	10 mm
----	-------

Dmax(S)	26 mm
---------	-------

Ds	23 mm
----	-------

H	34 mm
---	-------

H2	3.8 mm
----	--------

H3	6.5 mm
----	--------

Z	18 mm
---	-------

### Contact to Schmalz

J. Schmalz GmbH | Johannes-Schmalz-Straße, 72293 Glatten, Deutschland | +49 7443 2403-102 | [customercenter@schmalz.de](mailto:customercenter@schmalz.de)

## Technical Data

Attribute	Value
Suction force	4.71 N
Pull-off force	19 N
Volume	5.222 cm <sup>3</sup>
Curve radius (min) (convex)	30 mm
Size	25
Nipple	N 016
Number of folds	2.5
Suction cup material	High temp material HT1
Material hardness	60 °Sh
Weight	3.9 g
Product family	FG

## Accessories



### SA-NIP N016 G1/8-IG DN350

Part no. 10.01.06.05731

Suction cup connection nipple

Nipple: N 016

Thread G1: G1/8-F

Overall length: 18.5 mm

Fitting length: 12 mm

Nominal size: 3,50 mm

Material: Aluminium



**SA-NIP N016 G1/8-AG DN350**

Part no. 10.01.06.05735

Suction cup connection nipple

Nipple: N 016

Thread G1: G1/8-M

Overall length: 20 mm

Fitting length: 6 mm

Nominal size: 3,50 mm

Material: Aluminium



**SPI 25 PEEK**

Part no. 10.01.06.03286

Insert disc for preventing film from being drawn in

Size: 25

Material: Polyetheretherketon

Application: FG25/FGA25